

Multi-Stream Applicator


for Liquid Applied Sound Deadener

Multiple Orifice Nozzle Assembly For Dispensing Bands Of Material



2600-013-005-AA Dual MSA Valve
Patented Technology

- ▶ **Dual Valve Design Can Dispense 3” or 6” Ribbons Paths With The Same Applicator**
- ▶ **Pattern Width Is Controlled By Width Of Nozzle Plate**
- ▶ **Innovative Pattern And Orifice Spacing Configured For Multiple Application Requirements**
- ▶ **Used In Conjunction With Sealant Equipment’s Positive Displacement Servo or Servo-Pneumatic Dispense Systems**

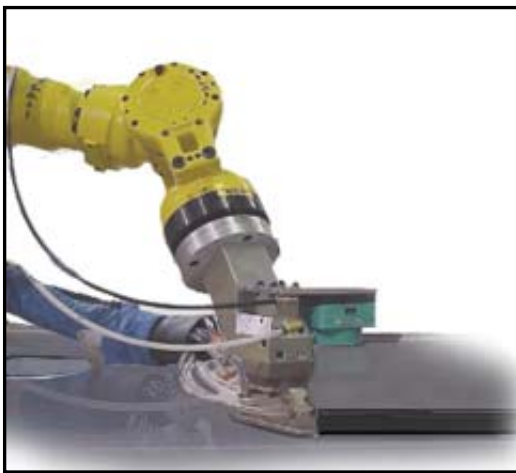


Applications

- Water based NVH materials
- Vinyl coatings
- Masking applications
- Sound deadening applications

Benefits

- Low maintenance, simple mechanical design
- Low shear application reduces wear
- Low pressure application for improved reliability
- Consistent ribbon and film build
- Controlled pattern width w/ (46) stream orifices

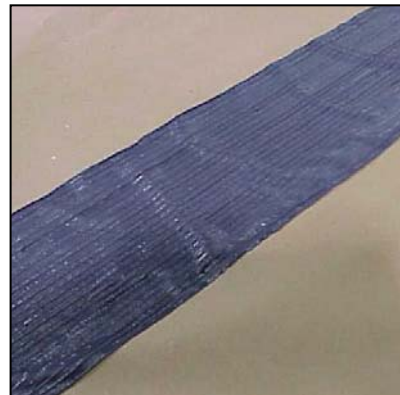


2600-013-005-AA Dual-Valve MSA




SPECIFICATIONS:

| | |
|-------------------------------|---|
| Weight (Dry): | 4.65 lbs; 2.11 kg. |
| Height: | 4.14"; 105.16 mm |
| Width: | 7.00"; 177.8 mm |
| Depth: | 2.88"; 73.15 mm |
| Material Inlet: | 3/8" N.P.T. (F) |
| Material Outlets: | (4) Carbide Stream Orifices |
| Air Ports: | (4) 1/8" N.P.T. (F) (Open/Close) |
| Air Pressure Required: | 60 P.S.I. (4.0 Bar) Min. |
| Mounting Holes: | #10-32 UNC & (2) 1/4" Standard Dowel Pin Holes |
| Packings: | Elastoplastic |
| Actuator: | 4-Way Pneumatic Valve |
| Service Kit: | 2150-456-000 (Sold Separately) |

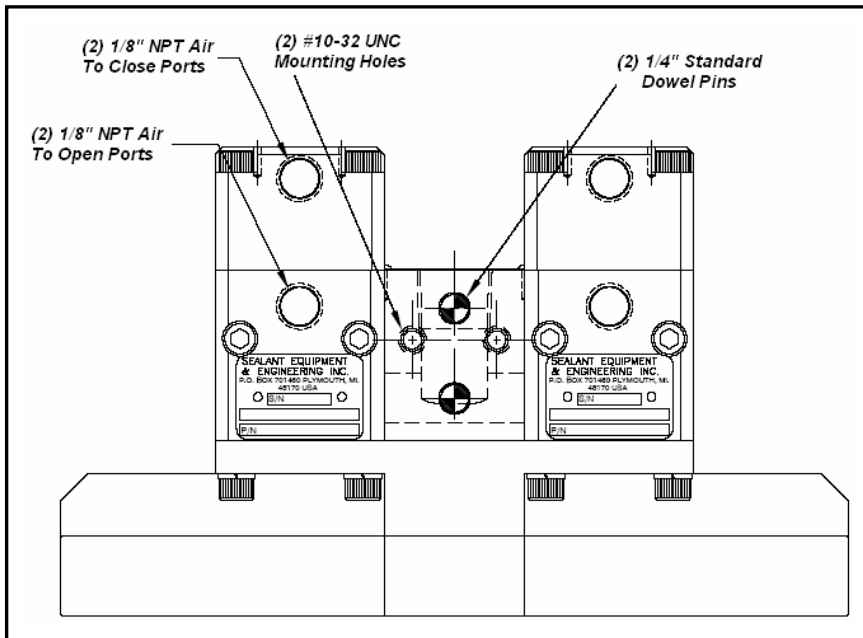

Mounting Configuration

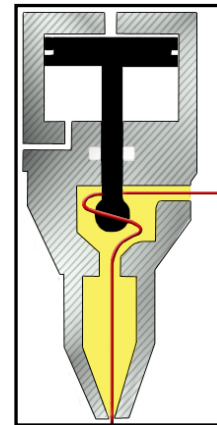

No-Drip®
Dispense Valve
Technology

ADDITIONAL DUAL MSA MODELS:

2600-013-007-AA

-005-AA w/SST fluid body

Form 013-005-0610 • Copyright 2006



Manufacturers of Precision Dispense Systems & Valves

45677 Helm Street • P.O. Box 701460

Plymouth, MI 48170 • USA

Phone: (734) 459-8600

Fax: (734) 459-8686

Web: www.sealantequipment.com/valves

E-mail: valves@sealantequipment.com